

COLORADO MINERAL  
VOLUME A<sup>720</sup> 1868-9

FIELD NOTES  
MINING CLAIMS

A  
1868-9

720




Nov. 2 1857

See Amended Notes

No. 37

Field Notes of the Elliptic  
<sup>No. 37</sup>  
Side ~~Survey~~ - known as  
the Elliptic Side in Greg-  
ory Mining District Gilpin  
County Colorado

Township 3. South R. 73. West

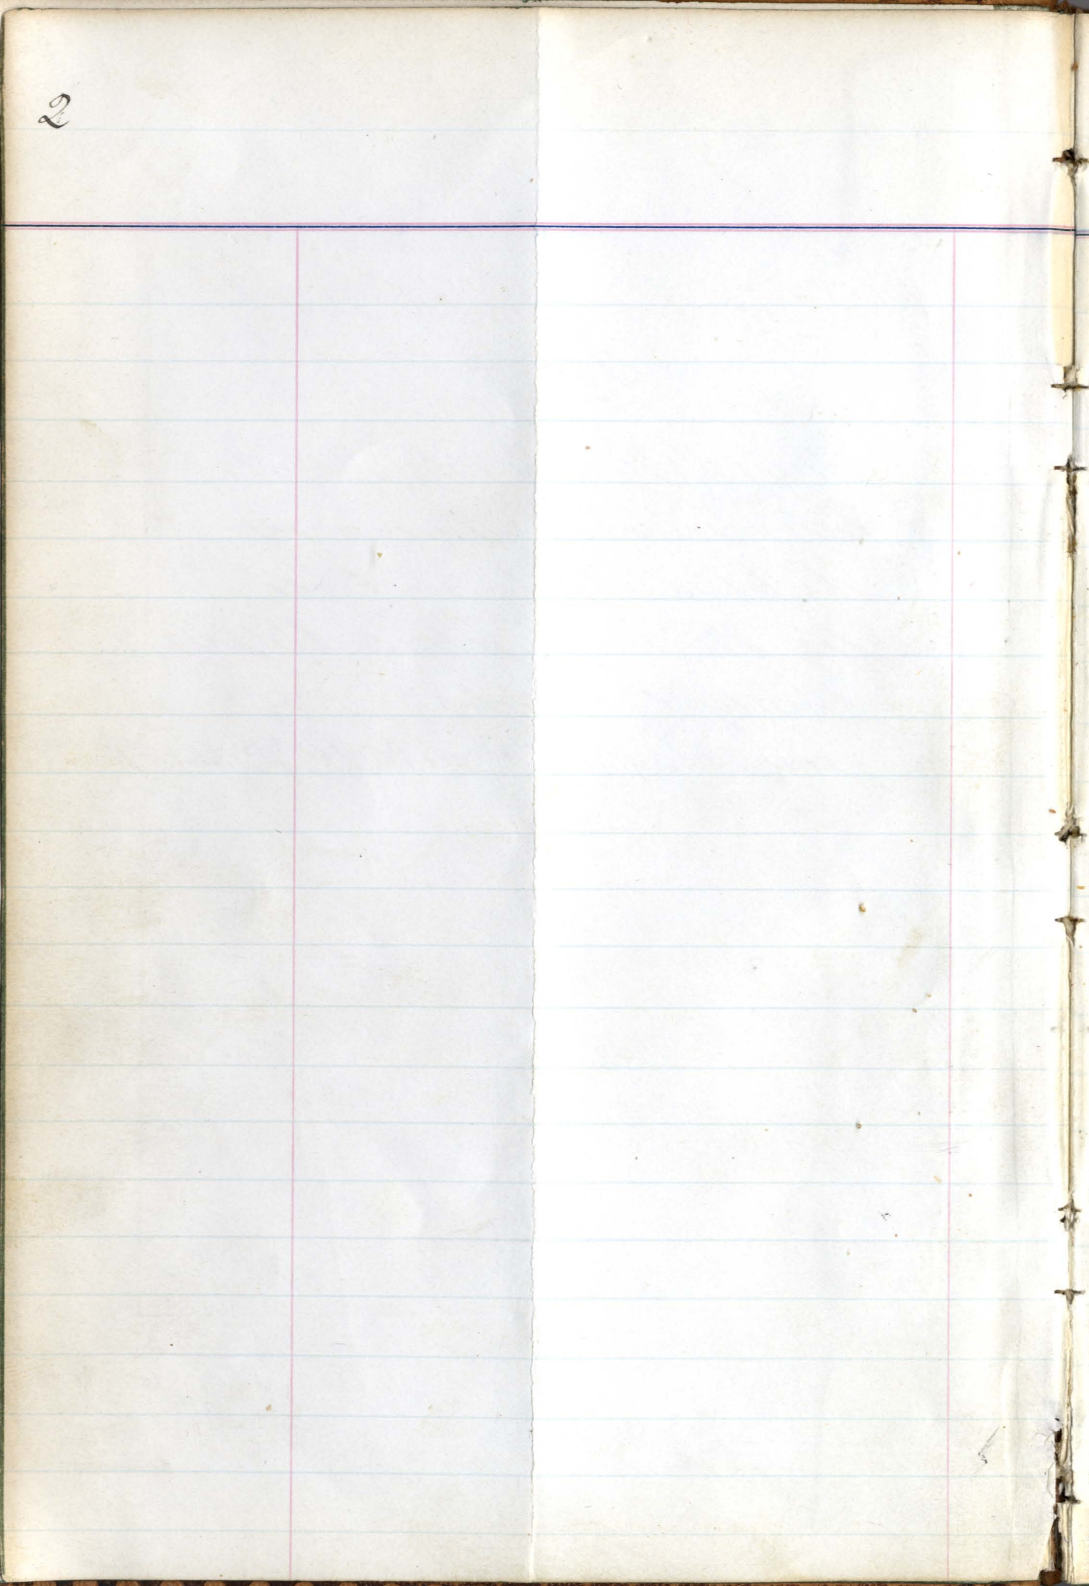



Began at Section Post on  
 the North Guide Meridian  
 the same being the estab-  
 lished corner of Sections  
 Two Seven (7) and Eigh-  
 teen (18) Sp. Three (3) South  
 Range Survey two (72)  
 West and Sections Two  
 Seven (12) and Thirteen  
 (13) Sp. Three (3) South  
 Range Survey three  
 (73) West.

Jan 15° E.

Thence N 39° 45' N.

9.10 to Sink Side which bears  
 S. 80° N.

14.20 to Bottail Side which  
 bears E. N.

18.45 to angle on connecting  
 line.

Thence N 79° 21' N.

1.00 to Gregory Side which





bears S. 49° N.

3.20 to Port Thomas side which  
bears S. 48° 45' N.

5.50 to Port Simons side  
which bears N. 84° E.

6.30 to West President side  
which bears S. 89° 30' N.

6.90 to Concord or Blodoe side  
which bears S. 84° N.

12.50 to Rockard Gulch which  
wide - bears S. 75° 10' N.

15.30 to Gregory St Central City  
which bears S. 45° 45' N.

16.00 to Lawrence St Central  
City bears N. 71° 30' N.

17.17 to Square angle on the  
connecting line  
thence N. 37° 40' N.

2.57 to S. N. corner of property  
to be surveyed - which is  
Five Hundred feet on  
the Elliott side - along





the corner of the same in-  
 cluding the Discovery  
 claim and claims Nos  
 One (1) Two and One (1)  
 Two (2) and Three (3) East  
 from said Discovery  
 each of said claims be-  
 ing One hundred feet  
 in length. Also Twenty  
 five (25) feet each way from  
 the centre of said lots  
 the same being the amount  
 of surface allowed by  
 law in the said District

Set at the above named  
 corner a Pine post 8 in  
 square from which the  
 N. E. corner of the Mill &  
 Buell Mill bears S 31°  
 42' E. 57 1/2 ft.

From above corner  
 N 30° 15' W -







250 ft to centre of Westerly boundary  
any line of property.

Thence  $N 59^{\circ} 45' E$ .

250 ft to angle in side-

Thence  $S 87^{\circ} 45' E$ .

250 ft to Easterly boundary of  
property.

Established S. E. corner  
of property Pine past <sup>Pin square</sup>  
from which the Rocky  
Mountain Gas Well N. N.  
corner bears  $S 11^{\circ} N$ .

The N. E. corner was not  
established as it came  
inside of a Quartz Mill.  
The N. N. corner, establish,  
at a Pine past Pin square.  
Sub pine past Pin square  
at intersections of outer  
lines of property opposite  
the angle of the side-  
The above outer lines



10



were seen 25 feet from  
and parallel with  
the line of the lode.

The position of the lode  
and diaries were  
pointed out by Peter  
C. Johnson the owner  
thereof.

Nothing could be  
judged of the probable  
diaries of the lode from  
an examination of the  
Shaft on the same - that  
being full of water to  
the top.

Mr Johnson reports  
the principal shaft to  
be fifty (50) feet deep -  
timbered from the top  
to solid walls a distance  
of eighty feet.

This shaft shows a



12



crucies of Seven feet in  
widths - two feet of the  
same being of Iron-  
pyrites which Assays  
\$1000. per ton -

This Shaft 20 feet  
from West boundary of  
property -

There is also a  
Shaft on Discovery  
claim 25 feet deep -  
timbered to solid walls  
a distance of about  
10 feet -

Shows a crucie  
of about four and one  
half feet -

Iron pyrites  
coming in through  
whole width -

There has never been  
any one from this lode



14



tested in a mill-

This side if it runs as pointed out by Mr Johnson differs from any other side I have ever surveyed in the country - in that it makes so large a bend and does not return to the original general bearing.

About one fourth of the ground included in this property is covered by buildings among which are two Quercy Mills -



16



A list of the names of the  
individuals employed to  
assist in making the  
foregoing Survey

|                  |          |
|------------------|----------|
| William F. Sears | Chairman |
| Abner G. Cozens  | " "      |
| Louis F. Beers   | Apurman  |

We do hereby certify that we assisted  
Hon. Supt. D. P. Seymour in survey-  
ing the foregoing described prop-  
erty on the <sup>Traverse</sup> Elliotts, <sup>as the Elliotts</sup> Lake Gregory  
District of Gibson Co. C. D. and  
that the same has been in all  
respects to the best of our knowl-  
edge and belief well and faith-  
fully surveyed and the boundary  
marks planted according to  
instructions furnished by the  
Surveyor Gail W. F. Sears Chairman  
Abner G. Cozens " "  
Louis F. Beers Apurman



Subscribed and sworn to  
by the above named persons  
before me a Notary Public  
for the County of Gypsum in  
the Territory of Colorado  
this second day of November  
1847

E. W. Parnell  
Notary Public

I Abel Sayer, deputy surveyor  
do solemnly swear that in  
pursuance of a contract  
with Gen W. H. Lewis surveyor  
of the public lands of the  
United States in the Ter-  
ritory of Colorado bearing  
date the first day of March  
A. D. 1847 and in strict  
conformity to the laws of  
the United States and the  
instructions furnished



by the said Surveyor General I have faithfully surveyed the Elliott Lode as per said instructions - known as the Elliott Lode Gregory Mining District Gilpin County C.S.

And I do further solemnly swear that the foregoing are the true and correct notes of such survey.

Wm. Sayre  
Dep. Surveyor

Subscribed by said Wm. Sayre deputy surveyor and sworn to before me a Notary Public for Gilpin County in the Territory of Colorado this second day of November A.D. 1867.

Ed. C. Parmelee  
Notary Public





Surveyor General's office  
Denver C.S., Nov 9<sup>th</sup> 1867  
The foregoing field notes  
of the survey of the Ellish  
lode, executed by Hal  
Sayer under his contract  
of March 1<sup>st</sup> 1867 having  
been critically examined  
the necessary corrections  
and explanations made  
the said field notes &  
the survey they describe  
are hereby approved  
W. S. D. Lessig  
Surveyor General of  
Colorado & Utah

